


AUTOMATIC SLEEVE WRAPPER+PE FILM SHRINK TUNNEL

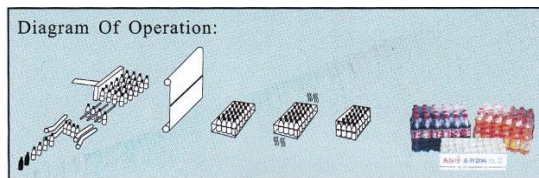

- The up and down magnetic switch control system prevents mistakes whilst sealing and it protects the operator.
- The “Omron” programmable logic controller (PLC) allows for stable performance.
- The “Schneider” AC contactor allows for intelligent temperature control.
- The large power conveyer motor as well as a steppes speed regulator ensures smooth feeding.
- The up and down large power fan system ensures excellent shrinkage time, every time.
- The super cooling system ensures the perfect shape of finished products after shrinking.

Specification

Model	SQJ-5040A
Voltage	3 Phase 220V/380V , 50-60Hz
Power	3KW
Capacity	0-8 Packing /minute
Air source supply	250L/min 0.4-0.6Mpa
Width/thickness of the film	Max 590mm/0.03-0.025mm
Sealing length of sealing bar	600mm
Max.packing dimension	420(L) x 300(W) x 350(H)mm
Min.packing dimension	250(L) x 50(W) x 100(H)mm
Machine Size	1060 x 1600 x 1930mm
Conveyer driver size	900(L) x 306(W) x 800(H)mm 1700(L) x 306(W) x 8000(H)mm
Machine Weight	370KGS
Shrink film	PE, POF,PVC,PP



บริษัท หัวเหรียญ อินเตอร์แพ็ค จำกัด

234 ม.2 ถ.โชตนา ต.ดอนแก้ว อ.แมริม จ.เชียงใหม่ 50180

โทร.053-120222 แฟกซ์. 053-120200 มือถือ. 081-4445606

WWW.IPACK.CO.TH

E-mail: ipack.sale@gmail.com

Line ID: ipackbkk

